

LED HEADLIGHT

900Series

UR-1B901HL

Functions, Homologation

Functions : Low Beam, High Beam
Homologations : ECE R112, R10 DOT FMVSS 108

Optical & Electric Features

LED Type : OSRAM OEM Vehicle LEDs
Color Temp : 5700K
Power : Low Beam: 14W
High Beam: 20W
Current Draw @ 12V: : Low Beam: 1.16A;
High Beam: 1.66A

Electromagnetic Features


EMC Grade : CISPR 25 Class 4
Operating Voltage : 10V~30V
Connector : HB4/9006 /AMP 2 Pin/ H4

Mechanical Features

Size : 130 X 107 X 164mm
Housing Material : Aluminum
Lens Material : Anti-UV PC
Lens Processing : Surface Hardened
PC Brand : COVESTRO 2407
IP Rate : IP66, IP6K9K
Work Temp : -40~+50°C

So this is Life

Life Time : >30,000h

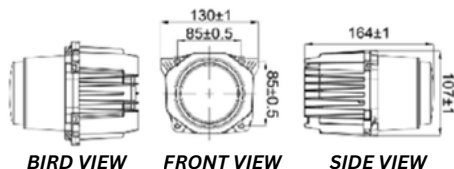


BIRD VIEW

FRONT VIEW

SIDE VIEW



isolux E-DHL-90, Low beam, H.:1.0m, tilt: 0°,1lux@140+m

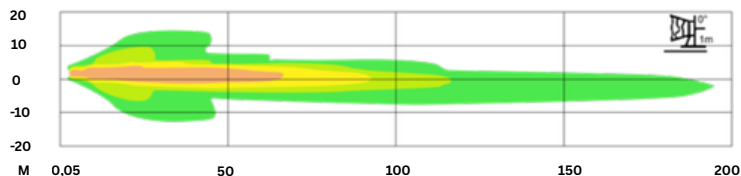

isolux E-DHL-90, Low beam, H.:1.0m, tilt: 0°,1lux@140+m

