

LED WORKLIGHT

3 COLOR

UR-1C026WL3C

Functions, Homologation

Beam pattern	: Flood Beam
Homologations	: ECE R112, R10 DOT FMVSS 108,

Optical & Electric Features

LED Type	: 32pcs LEDs
Emitting Color:	: White
Color temp	: 3000K-6000K (adjustable)
Raw lumen	: 10320LM
Effective Lumen	: 2956LM,45w (Cold white) 3308LM,42w (Natural white) 3008LM,45w (Warm white)
Raw Power	: 115.2W
Effective Power	: 40~45W(to color temperature)

Electromagnetic Features



EMC Grade	: CISPR25 Class 5
EMC Standards	: ISO 13766 ISO 14982 ISO 7637-2
Operating Voltage	: 10V~30V
Connector	: 2 pin DT

Mechanical Features

Size	: 110 X 146 X 90mm
Housing Material	: Aluminum
Lens Material	: Anti-UV PC
PC Brand	: COVESTRO 2407
Mount	: Bottom Bracket
Bracket Material	: Die-cast Aluminum
Bolt Material	: SUS316 Stainless Steel
IP Rate	: IP68, IP6K9K (SAE J1455)
Anti-Corrosion	: ISO 9227 240H
Vibration Level	: 15.3Grms 24~2000Hz
Impact Force	: 60G
Work Temp	: -40~+80°C
Over Temp	: GB/T 10485
Protection	: GB 4599-2007

So this is Life

Life Time	: >30,000h
-----------	------------

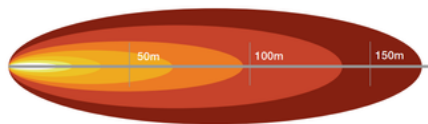

Variable color temperature

Simply switch to 3000K when it becomes rainy, foggy or dusty, higher safety for driving.

6000K Cold white

4500K Natural white

3000K Warm white

